




MATWORKS

COMPREHENSIVE FLOORING SOLUTIONS

Economical Anti-Fatigue Mats

Double Air, Foot Lover, and Comfort King are three affordable anti-fatigue options that provide comfort for your employees. They are chemical resistant, so they can be placed in various environments. With little variance in price and construction, the available color, surface texture, and thickness options differentiate each product for your needs.

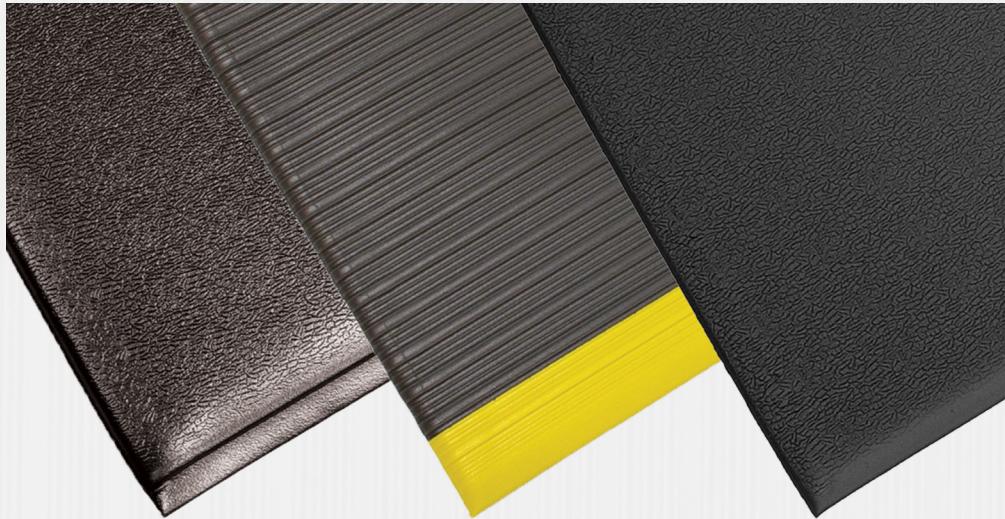


Double Air
3/8" or 1/2"

Foot Lover
3/8", 1/2" or 5/8"

Comfort King
3/8"



PRODUCT INFO

Anti-Fatigue Matting

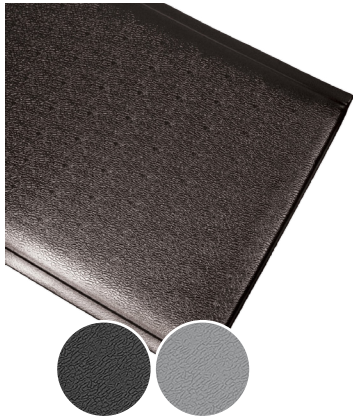



Textured; Black & Grey

DOUBLE AIR		
Tensile	75 lb/in ² minimum	ASTM D412, <i>DIE C</i>
Elongation	50% minimum	ASTM D412, <i>DIE C</i>
Tear	15 lb/in minimum	ASTM D624, <i>DIE C</i>
Durometer	75 +/- 5, Shore 00	ASTM D2240
Flammability	Pass	DOT FMVSS 302 (Horizontal burn test)
	Pass, <1/2" diameter	CPSC FF 1-70 (Methenamine tablet test)
Suggested Service Temperature	-20°F to +200°F <small>*This range represents the general temperature for most flexible vinyl products</small>	

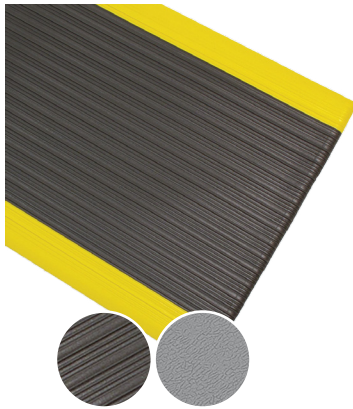


Ribbed & Textured; Black & Grey

FOOT LOVER		
Tensile	100 lb/in ² minimum	ASTM D412, <i>DIE C</i>
Elongation	100% minimum	ASTM D412, <i>DIE C</i>
Tear	15 lb/in minimum	ASTM D624, <i>DIE C</i>
Durometer	65 +/- 5, Shore 00	ASTM D2240
Flammability	Pass	DOT FMVSS 302 (Horizontal burn test)
	Pass, <1" diameter	CPSC FF 1-70 (Methenamine tablet test)
Suggested Service Temperature	-20°F to +200°F <small>*This range represents the general temperature for most flexible vinyl products</small>	

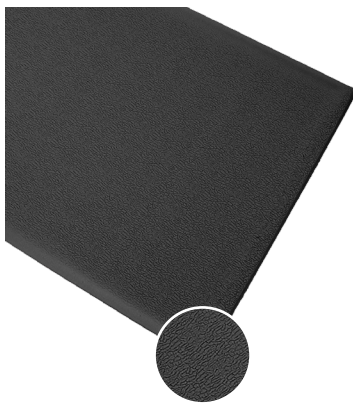

Textured; Black

COMFORT KING		
Tensile	100 lb/in ² minimum	ASTM D412, <i>DIE C</i>
Elongation	125% minimum	ASTM D412, <i>DIE C</i>
Tear	20 lb/in minimum	ASTM D624, <i>DIE C</i>
Durometer	65 +/- 5, Shore 00	ASTM D2240
Flammability	Pass	DOT FMVSS 302 (Horizontal burn test)
	Pass, <1" diameter	CPSC FF 1-70 (Methenamine tablet test)
Suggested Service Temperature	-20°F to +200°F <small>*This range represents the general temperature for most flexible vinyl products</small>	



Specifications - Double Air	
Size	Custom sizes are available in widths up to 5'
Embossing	Textured
Color	Black or grey
Customizable	Add custom logo* <small>*Based on order volume</small>
Surface	High-density PVC foam
Backing	Closed-cell PVC sponge
Surface Density	35 lb/ft ³
Thickness	3/8" and 1/2"

Specifications - Foot Lover	
Size	Custom sizes are available in widths up to 6'
Embossing	Textured or ribbed
Color	Black or grey
Border	Optional yellow stripped border
Material	Closed-cell PVC foam with urethane top coat
Density	18 lb/ft ³
Thickness	3/8", 1/2", and 5/8"

Specifications - Comfort King	
Size	Custom sizes are available in widths up to 5'
Embossing	Textured
Color	Black
Material	PVC + nitrile-blended foam
Surface Density	20 lb/ft ³
Thickness	3/8"

Specifications	
Installation	Loose laid
Performance	2 years* <small>*Under normal use</small>

100% Customer Satisfaction*
*Based on the life of the product

CLEANING INSTRUCTIONS

- Scrub with a deck brush (as needed), using a detergent with a neutral pH, or rinse with a hose or pressure washer. Hang mat to dry.
- Always make sure the mat is dry before placing it back in service

