

# MATWORKS

COMPREHENSIVE FLOORING SOLUTIONS




# Comfort Flow™

Anti-Fatigue Matting



- Comfort Flow™ mats are highly durable slip-resistant mats best suited for wet environments. They are versatile, so they can be placed where grease, oil, and chemicals may be present.
- Comfort Flow features drainage holes that allow liquids to pass through.
- The nitrile rubber cushion provides excellent anti-fatigue qualities and features a lifetime anti-microbial treatment that helps prevent odors and degradation to the mat.
- Unlike traditional floor mats, which are typically heavy and difficult to move, Comfort Flow has a flexible design that makes it easy to roll, handle, clean, and store.

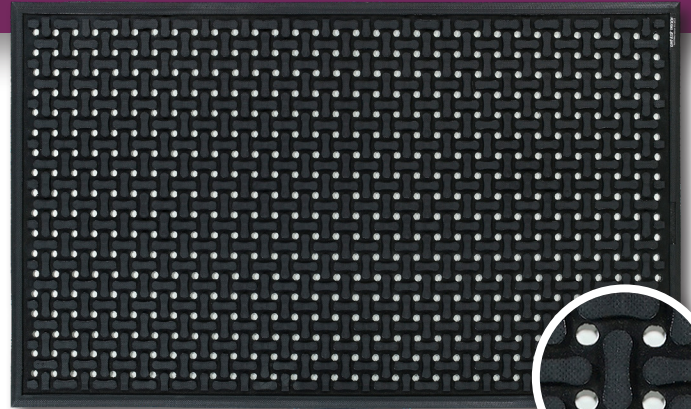

# PRODUCT INFO

Specifications	
Material	Closed cell nitrile rubber foam
Overall Thickness	3/8"
100% Customer Satisfaction Based on the life of the product	

Standards & Testing	
Durometer	45
Compression Deflection	43.8% at 20 psi 55.7% at 40 psi
ASTM C1028-96 static coefficient of friction	Dry 1.00 Wet 0.91
ESD rating of static dissipative	Surface to surface at 50% relative humidity 2.0 X 10 <sup>9</sup> ohms  Surface to surface at 12% relative humidity 2.5 x 10 <sup>9</sup> ohms
Certified high-traction by the National Floor Safety Institute (NFSI)	
Passes flammability standard DOC-FF1-70	
Passes fungal resistance standard ASTM G21	

Size(s)	
Size (ft.)	Size (in.)
2' x 3'	23" x 34"
3' x 5'	34" x 56"
3' x 9'	34" x 109"
4' x 6'	42" x 68"
Mat sizes are approximate as rubber shrinks and expands in conjunction with temperature and time. Tolerable manufacturing size variance is 3-5%.	



## CLEANING INSTRUCTIONS

- Scrub with a deck brush (as needed), using a detergent with a neutral pH, or rinse with a hose or pressure washer. Hang mat to dry.
- Comfort Flow mats can be folded and washed in a commercial dishwasher.\*
- Always make sure the mat is dry before placing it back in service.

\*Please check your local health code for restrictions.