

Powerlinks (Grid)

Category: Entrance

SPECIFICATIONS

Material:	100% virgin PVC Quads
Properties:	Injected molded virgin PVC, 2' x 3' interlocking panels
Size Options:	18" x 24" or custom
Height:	5/8"
Usage:	Ideal for entrances with high traffic or heavy loads i.e. grocery stores, commercial buildings, hotels and healthcare facilities
Maintenance:	Sweep or vacuum daily; wet mop as needed
Warranty:	3-Year limited warranty


Performance

Tensile Strength:	ASTM D-412:2640 psi
Elongation at Break:	ASTM 412 Die C: 365 psi; 100% Modulus; ASTM 412: 1339 psi
Hardness:	ASTM D-2240-86: 85
Specific Gravity:	STM D-792: 1.34

BENEFITS

- Can be made into any length and width configurations
- Can be surface-mounted or recessed
- Reduces slips and falls
- Helps remove dirt, debris and moisture
- Improves appearance of entrance
- Long lasting and durable
- Reduces cleaning and maintenance costs
- Available in multiple colors
- Consolidated shipping

SAMPLE PRODUCT IMAGES

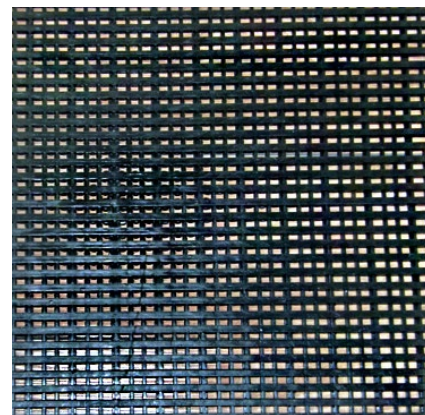

The Matworks Company, LLC
11900 Old Baltimore Pike
Beltsville, MD 20705
(800) 523-5179
info@thematworks.com